

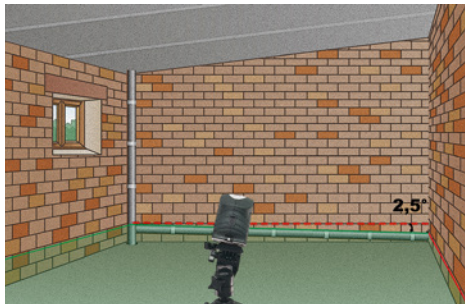


## AutoCross-Laser 2 XPG

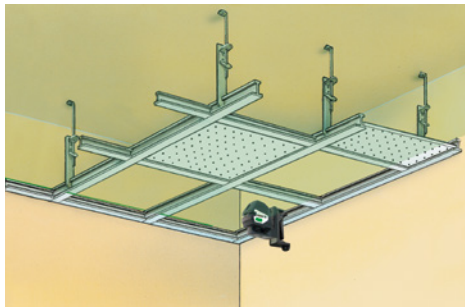

Cross-line and 5-point laser with hand receiver mode and magnetic wall bracket

Rev.1114

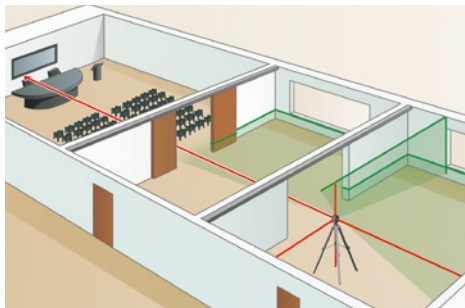


- **Green laser technology**
- Extremely bright green laser cross at front in the **DLD design achieves high-quality lines** as well as a clean and clear and therefore easily visible line image.
- The **5 laser points** are placed each in 90° on the horizontal and vertical level of the laser lines. On the edges of the laser lines there are formed 3 intercept points out of laser line and point.
- **The plum and ceiling points** allow markings to be easily transferred from the floor to the ceiling.
- The **magnetic wall bracket** allows the unit to be used as a stand-alone device or in combination with other devices – on walls and attached to magnetic objects
- Ideal for **mounting on drywall construction profiles**
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Tilt mode is an additional feature** that permits gradients to be laid out.
- **Individually switchable** laser lines
- **Out-Of-Level:** Is indicated by optical and acoustic signals when the unit is outside its self-levelling range.
- **GRX-Ready:** in combination with the optional laser receiver, the integrated hand-held receiver mode permits detection of laser lines at long distances and under unfavourable light conditions.
- **Transport lock:** A pendulum lock protects unit during transport.


### TECHNICAL DATA

<b>ACCURACY</b>	2 mm per 10 m
<b>SELF-LEVELLING RANGE</b>	± 3°
<b>LASER WAVELENGTH</b>	line lasers green 510 nm plumb laser red 635 nm
<b>LASER</b>	line lasers, class 2 < 1 mW
<b>POWER SUPPLY</b>	4 x 1.5V alkaline batteries
<b>OPERATING TIME</b>	approx. 3,5 hrs
<b>WORKING TEMPERATURE</b>	0°C ... +45°C
<b>STORAGE TEMPERATURE</b>	-10°C ... +70°C
<b>WATER AND DUST PROTECTION</b>	IP 54
<b>WEIGHT</b>	550 g (without wall bracket)
<b>DIMENSIONS</b>	ACL 2 XPG 130 x 105 x 70 mm (W x H x D)

1H 1V

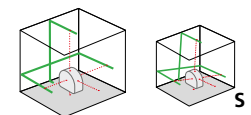

**AutoCross-Laser 2 XPG**  
including carrying case  
+ magnetic wall bracket  
+ batteries  
**Packing dimension** (W x H x D)  
440 x 370 x 110 mm

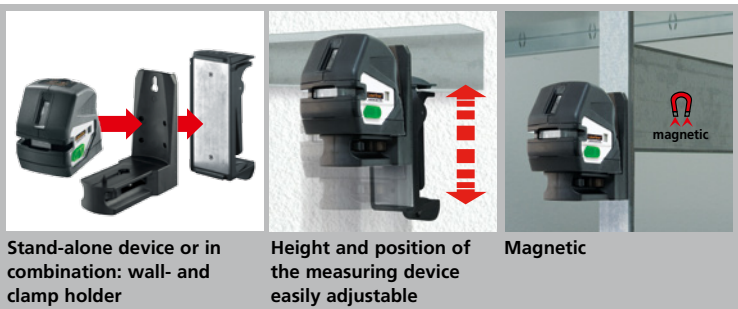

Stand-alone device or in combination: wall- and clamp holder

Height and position of the measuring device easily adjustable

Magnetic

ARTICLE	ARTICLE NO	EAN-CODE	PU
AutoCross-Laser 2 XPG	060.111A	4 021563 692866	1

