

# Laserliner®




## VideoFlex G2 SnakeCamera G2 10m



**10 m**  
Focus 5 cm

Professional video inspection system for visually inspecting areas that are difficult to access – also over great distances

Rev.0512

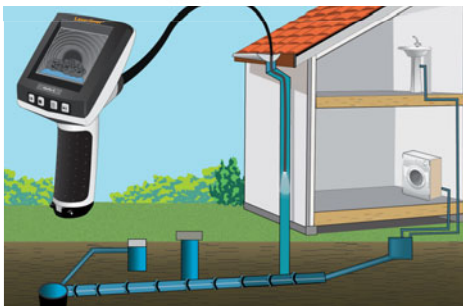

Camera head (ø 9 mm) with LED-Lighting  
3,0" LCD

- **The camera head at a FlexCamera** transfers pictures directly to a LCD-Monitor.
- **Problem locating:** the camera indicates what is behind or in objects, walls circuits or cables etc. even under worst light conditions, due to the LED-lighting.
- **REC-Function:** still picture and video can be recorded for a later analysis.
- **Waterproof camera head and cable.**
- **Ideal for difficult accessibly areas** due to the very small measuring head (ø 9 mm)
- **Multilingual On-Screen-Display**
- **Camera unit can be replaced** to suit application
- **Rotation:** The manual image rotation function enables the image to be rotated by 180° on the monitor.
- **Formattable SD-Card**
- **Webcam function**

### TopGuide G2

- **Guide sleeve** for mounting on the camera head
- The specially ground sleeve allows for **optimal gliding on uneven surfaces**, for example dirty pipes.
- **Reduces jamming and contamination** of the camera head.
- Suitable for **9 mm camera head**

### TECHNICAL DATA

<b>CAMERA HEAD</b>	ø 9 mm, waterproof, IP 68
<b>CAMERA FOCUS</b>	5 cm
<b>SCREEN TYPE</b>	3,0" LCD
<b>RESOLUTION DISPLAY</b>	320 x 240 pixel
<b>RESOLUTION PICTURE / VIDEO</b>	1280 x 960 pixel / 320 x 240 pixel
<b>FORMAT PICTURE / FORMAT VIDEO</b>	JPEG / AVI
<b>LED</b>	3 luminosity degrees
<b>ZOOM</b>	4 x digital zoom in 10% steps
<b>MEMORY</b>	32 MB / Supports up to max. 8 GB SD card
<b>LENGTH OF FLEX CABLE</b>	10 m
<b>INTERFACE</b>	USB 1.1
<b>AUTO SHUT OFF</b>	5 min
<b>POWER SUPPLY</b>	4 x AA 1,5 Volt batteries
<b>WEIGHT</b>	incl. batteries and flexcamera 1,75 kg



**10 m**  
Focus 5 cm

### VideoFlex G2

inclusive carrying case  
+ SnakeCamera G2 10 m  
+ TopGuide G2  
+ software for webcam function  
+ batteries

**Packing dimension (W x H x D)**  
450 x 375 x 125 mm

ARTICLE	ARTICLE NO.	EAN CODE	PU
VideoFlex G2	082.110A	4 021563 682294	2

